



Features & Benefits

- ✓ Low profile construction with an elegant design
- ✓ Suited for recess and surface mounting
- ✓ Light output equivalent to 20W halogen light
- ✓ Sustainable and energy-efficient LED
- ✓ Wide range of DC operating voltage (11-30V)
- ✓ IP64 rated and suitable for bathroom use

Applications

- ✓ general lighting for small spaces
- ✓ accent lighting and under cabinet lighting
- ✓ ceiling and furniture lighting
- ✓ lighting for yachts, caravans & RUV's

Space

The Eyeleds Space is an exceptional alternative for traditional 20W halogen lighting. The fixture has an overall height of only 10mm! Low profile construction is achieved with using state of the art LED technology. The Space is powered by a 6W Lamina LED with wide beam distribution making this product suitable for general lighting applications.

The aluminum housing provides an optimal heatsink and guarantees an extremely long lifespan. The Space operates on 11 to 30V DC and can easily be connected to 12 or 24V battery power in yachts, caravans and RUVs.

The Space is easy to install, and can be used as a surface or recess mounted luminaire for ceilings, walls, kitchens and furniture. The IP64 rating allows for protection against dust and water making this product well suited for damp locations such as bathrooms.

High end materials and a modern design make the Eyeleds Space a stylish and sustainable lighting solution, both in residential and commercial applications.

Specifications

Lumen Output

| | |
|----------------|--------|
| Cool White LED | 290 lm |
| Warm White LED | 235 lm |

Power Consumption

| | |
|--|----|
| | 6W |
|--|----|

Efficacy

| | |
|----------------|---------|
| Cool White LED | 48 lm/W |
| Warm White LED | 39 lm/W |

Color Temperature

| | |
|----------------|-------|
| Cool White LED | 6500K |
| Warm White LED | 3000K |

Beam Angle

| | |
|--|------|
| | 150° |
|--|------|

Rated Life

| | |
|--|---------------------|
| | up to 100.000 Hours |
|--|---------------------|

Materials

| | |
|---------|---------------------|
| Lens | Polycarbonate |
| Housing | Aluminum (Anodized) |

Fixture Color(s)

| | |
|--|---------------------------------|
| | Aluminum Matte (Optional White) |
|--|---------------------------------|

Surface Temperature

| | |
|--|-----------|
| | Max. 50°C |
|--|-----------|

Operating Temperature

| | |
|--|----------------|
| | -10°C to +50°C |
|--|----------------|

Voltage

| | |
|--|--------|
| | 11-30V |
|--|--------|

Warranty

| | |
|--|-----------------|
| | 3 Years Limited |
|--|-----------------|


Standards

| | |
|--|-----------|
| | CE |
|--|-----------|


Environment

| | |
|--|-------------------------------|
| | IP64, indoor application only |
|--|-------------------------------|

Dimensions

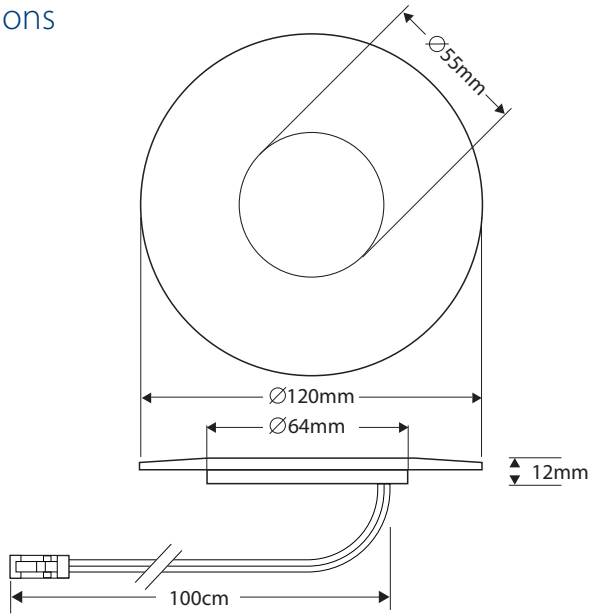

Example Connection Diagram

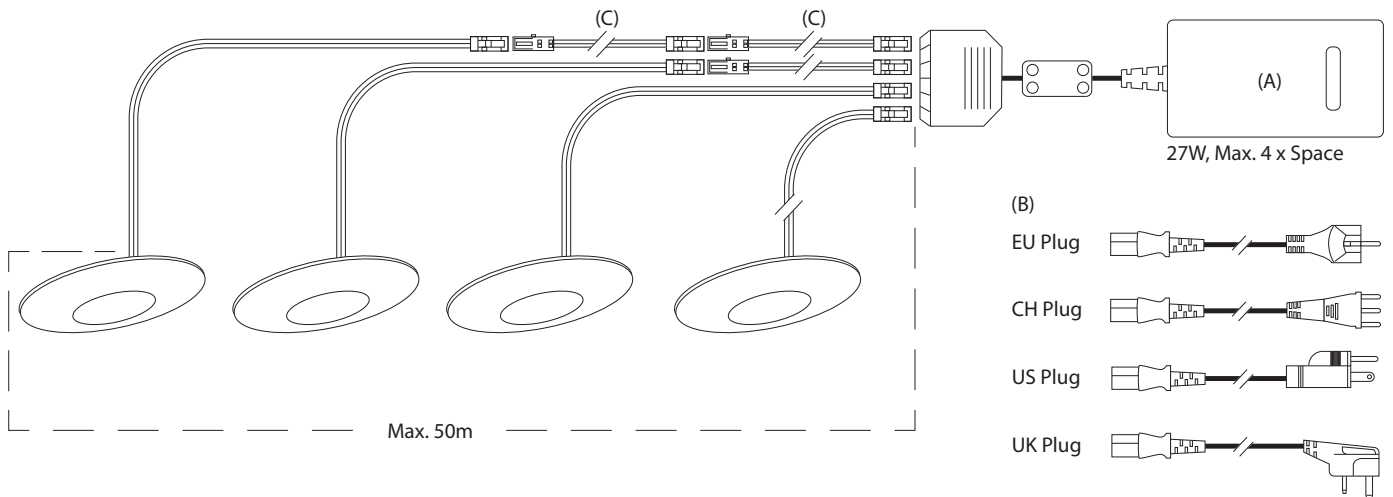

Finish & LED Color Options

| Description | Finish / LED Colour |
|------------------|-----------------------------|
| 968.560.0U.17509 | Aluminum Matte / Cool White |
| 968.561.0U.17509 | Aluminum Matte / Warm White |
| 968.560.0U.17509 | White / Cool White* |
| 968.561.0U.17509 | White / Warm White* |

* On demand and subject to minimum quantities

Accessories

| Accessory | # | Item Code |
|-----------------------|-----|------------------|
| Driver 28V / 27W | (A) | 324.073.0U.00502 |
| Power Cord, EU Plug | (B) | 324.034.0U.00102 |
| Power Cord, CH Plug | | 324.034.0U.00402 |
| Power Cord, US Plug | | 324.034.0U.00202 |
| Power Cord, UK Plug | | 324.034.0U.00302 |
| Extension Cable 200cm | (C) | 324.059.0U.00201 |